

# SUTTLE

## Traditional Telco




### Flush Mount Jack Plate: 2-1014-xx, Voice Duplex, East/West

#### Product Description

Jumpers all four wires between jack ports. Leads exit the jack port with four field-terminated leads to connect to the network. Although only tip and ring wire is necessary, the second pair can be used when required for a second line in the same loop application. This design allows multiple voice or data devices to share one phone line. Ideal for use with DSL modems in a bridged/loop wired environment.

#### Features

- \* Smooth faceplate design matches electrical faceplates
- \* Easy-mounting design, installs without mounting brackets
- \* Mounting screws provided with painted heads to blend smoothly into the design of the faceplate
- \* Loop wiring allows multiple voice or data devices to share a single phone line

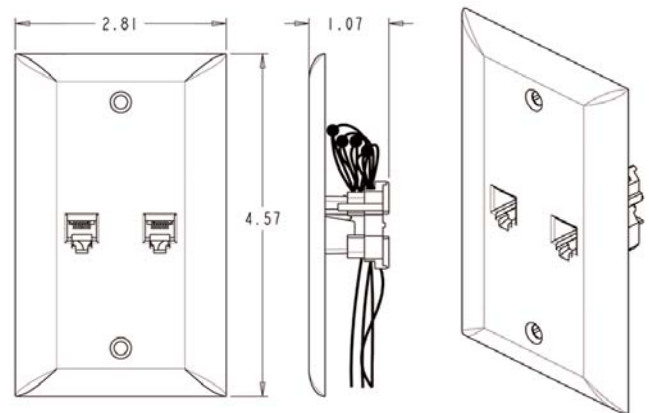

#### Product Specifications

Wiring:	USOC
Insertion Life:	750 cycles minimum
Housing:	High impact, UL 94V-0 rated thermoplastic
Contacts:	100 micro-inch nickel with minimum 50-inch gold min.
Connection:	Filled splice connectors

#### Electrical Specifications

Contact Pressure:	100 grams min.
Insulation Resistance:	500 megaohms
Contact Resistance:	10 milliohms max.
Voltage/Current:	140 VDC @ 1.5 amps max.
Dielectric Withstand:	1000 VAC RMS @ 60Hz min.
Complies with Part 68, FCC Rules	



Part Number:	2-1014-xx
Item Description:	4/4-conductor, filled splice connectors Voice Duplex East/West
Packaging:	1 unit per bag/20 bags per carton

Specifications subject to change without notice. Copyright 2003. Original: 04/04

1001 East Hwy 212  
Hector, MN 55342  
www.suttleonline.com

**Get Connected**

Toll Free: 1-800-852-8662  
Local: 1-320-848-6711  
Fax: 320-848-2361