


SUTTLE

SAM-VC12 Voice Module

User Guide

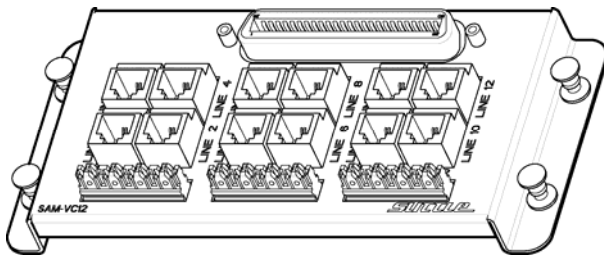


1001 East Hwy 212
Hector, MN 55342
www.suttlesoho.com

Toll Free: 1-800-852-8662
Local: 1-320-848-6711
Fax: 320-848-2361


Module Installation

Mounting:

If mounting in an SAE enclosure, assemble the grommets and plungers into the module. Press the grommet into the hole from the top of the bracket (see figure). Then press the plunger into the grommet.



Align the mounting pins with the grid holes on the back of the enclosure. With the mounting pin plungers in the “out” position, press the unit into the grid in the desired location, secure by pushing the plungers in.

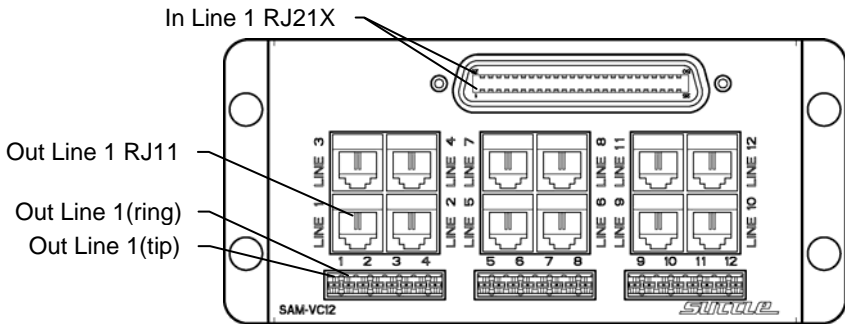


Terminate incoming service line:

Run a 25-pair cord with (male) plug end to the SAM-VC12 and connect to the 50-position (female) receptacle connector. This connector has lines 1 through 12 on pins 26 -tip (and 1 -ring) through 37 -tip (and 12 -ring).

Terminate outgoing lines:

Run RJ11 line cords from the jacks to the desired location, or use the 110 IDC terminals to terminate the outgoing lines.

NOTE: one pair of wires corresponds to each line from the phone company. (Line 1 = blue, Line 2 = orange, Line 3=green, Line 4=brown).

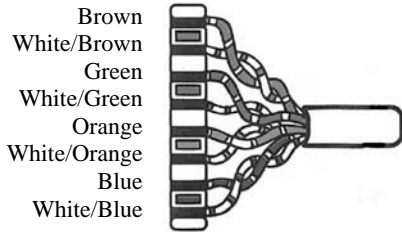

110 IDC Termination Procedure

Run twisted pair cable from the terminals to the desired location. Strip 3 in. of outer jacket from the cable. Punch individual cable pairs down on the 110 IDC. Starting at the blue position on the IDC, begin with the white wire of each pair as you progress to the orange position on the IDC as shown below. Press wires into slots with a 110-punch tool. Trim and discard excess wires.

The wire pair locations can be recorded on the wiring label supplied with this module. Attach the wiring label to the inside of the enclosure cover.

Important Information:

- Read and understand all instructions. Follow all warnings and instructions marked on the product.
- Do not use this product near water, --e.g., near a bath tub, wash basin, kitchen sink, wet basement, or near a swimming pool.
- Never push objects of any kind into this product through openings, as they may contact dangerous voltages.
- SAVE THESE INSTRUCTIONS.

Safety Information:

- Never install communications wiring during a lightning storm.
- Never touch uninsulated wires or terminals unless the wiring has been disconnected at the network interface.
- Never install communications components in wet locations unless the components are designed specifically for use in wet locations.

p/n 100962-00 Rev. B

1001 East Hwy 212
Hector, MN 55342
www.suttlesoho.com

Toll Free: 1-800-852-8662
Local: 1-320-848-6711
Fax: 320-848-2361