


Suttle DSL Line Conditioners

630 Series Wall Mount Adapters, 6 Position

Product Reference

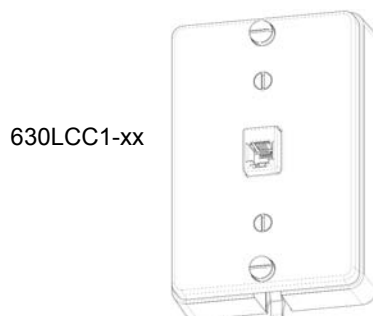

Product Description

The Wall Mount Adapter mounts to an existing wall mount phone jack providing one or two filtered lines for voice device communications (e.g. phone, fax, answering machine, Caller ID) and is available with an auxiliary DSL jack. Suttle wall mount DSL filters eliminate all erratic impedance from telephone equipment that interfere with DSL communications.

Product Features

- * Customer installable
- * Available in one or two line filtering configurations
- * Available in Plastic (3 colors)
- * Meets ANSI T1E1.4 7R2 standards for DSL filter compliance



Product Specifications

- Stop-band isolation is 21 dB from 25 kHz to 50 kHz and 25 dB or greater from 50 kHz to 12 Mhz
- Filter Topology is 2-pole Low Pass
- REN = 0.1 (B)
- DC resistance through T & R to telephone port is bags per carton 13 ohms maximum
- Loading capacity on telephone port is 15.5 nf
- Attenuation Distortion relative to 1 kHz 300 Hz to 3400 Hz is less than 0.4 dB

<u>Part Number</u>	<u>Item Description</u>
630LCC-xx	1 Line Filtered (pins 3 & 4)
630LCC-2F-xx	2 Lines Filtered (pins 3 & 4, 2 & 5)
630LCC1-xx	1 Line Filtered (pins 3&4), Auxiliary DSL Jack
630LCC1-2F-xx	2 Lines Filtered (pins 3 & 4, 2 & 5), Auxiliary DSL Jack

Colors:	(-52) Electrical Ivory, (-50) Ivory, (-85) White
Dimensions:	4.7" H x 3.2" W x 1.0" D
Packaging:	1 filter/bag; 20 bags/carton

Specifications subject to change without notice. Revised 06/02.